

DESCRIPTION


The BC-5000-6 is a dedicated battery charger for the WM-5225 and WM-5265 Wireless Microphones, WM-5325 Wireless Transmitter, and WT-5100 Portable Receiver, which work with AD-5000-6. It employs a quick charging system for nickel metal hydride (Ni-MH) batteries, allowing up to 6 wireless microphones to be fully charged within 3 hours.

SPECIFICATIONS

Power Source	12 V DC (optional AC adapter AD-5000-6 must be used)
Power Consumption	2.2 A
Charging Time	Max. 3 h
Number of Wireless Microphone to be Charged Simultaneously	6 pieces *
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	30 % to 85 %RH (no condensation)
Finish	Case: Steel plate, black, paint Microphone receptacle section: ABS resin, black
Dimensions	390 (W) × 118 (H) × 131 (D) mm (15.35" × 4.65" × 5.16") (including mounting adapter)
Weight	2 kg (4.41 lb) (charger with the mounting adapters attached)
Accessory	Mounting adapter (preinstalled on the unit) ×6
Option	Rechargeable battery: WB-2000-2 (containing 2 pieces) AC adapter: AD-5000-6

* Using the mounting adapter allows one each of the WM-5225, WM-5265, WM-5325, and WT-5100 to be charged in combination.

APPEARANCE

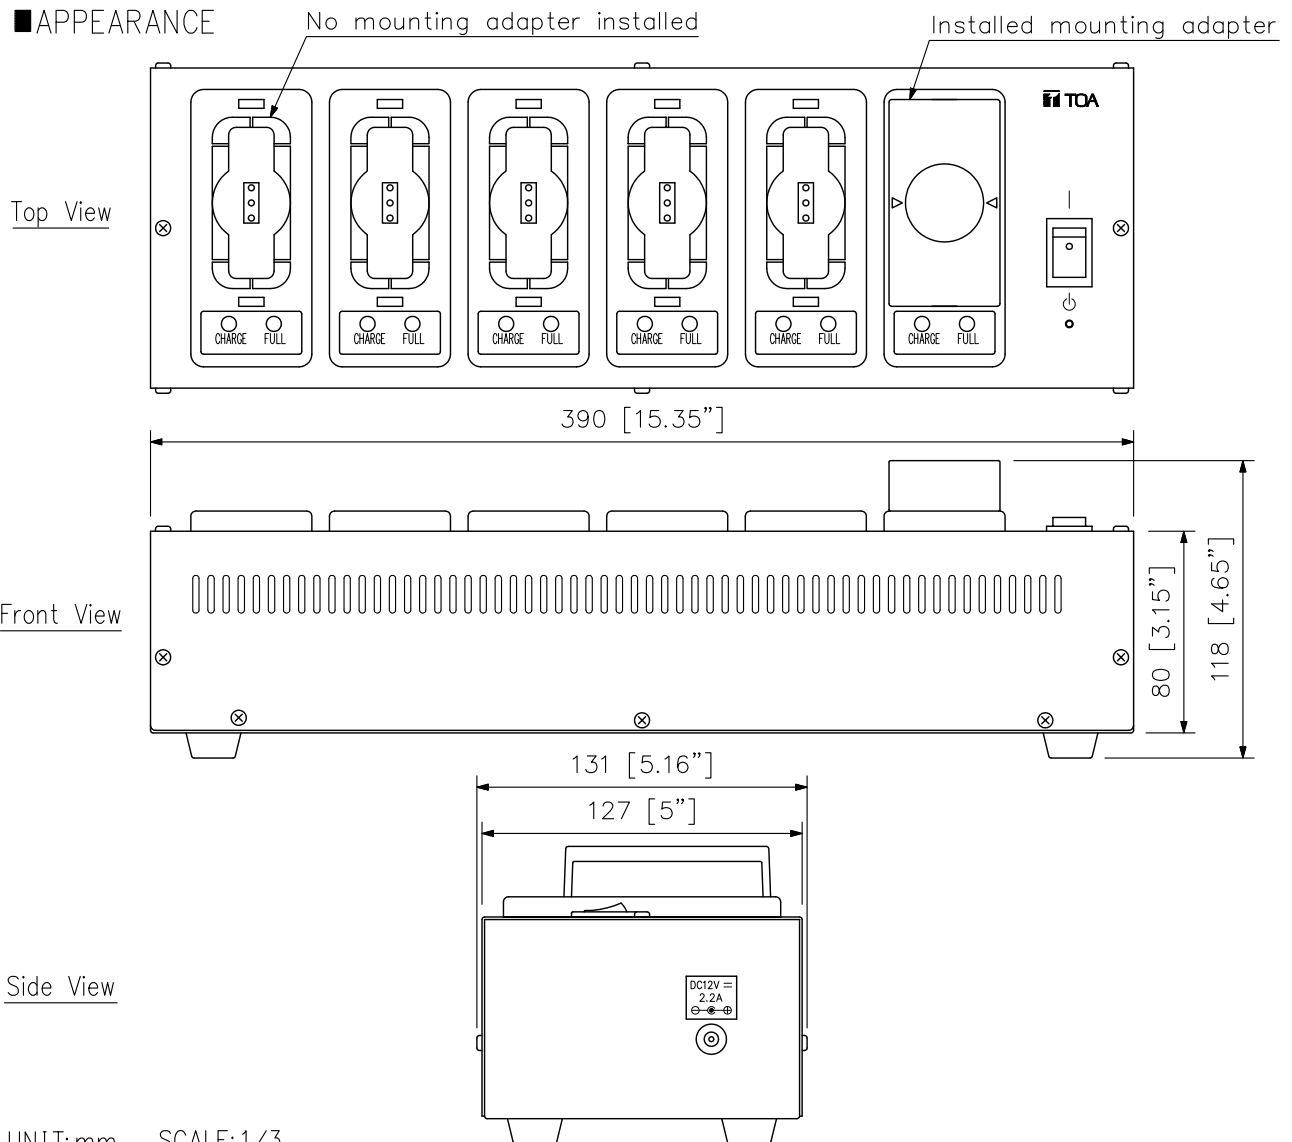

UNIT:mm SCALE:1/3