TOA

BOUNDARY MICROPHONE EM-700

■DESCRIPTION

The EM-700 is a low-profile, high-quality, cardioid condenser microphone suitable for installation on a lecture desk or table top in a conference room. It features optimum acoustic characteristics for sound pick-up applications when placed on a flat surface, realizing pure, natural sound quality.

■SPECIFICATIONS

Element	Electret condenser
Polar Pattern	Cardioid
Rated Impedance	120 Ω, balanced
Rated Sensitivity	−33 dB (1 kHz 0 dB=1 V/Pa)
Phantom Power	9 – 52 V DC
Frequency Response	35 Hz – 20 kHz
Low Cut	100 Hz, −12 dB/oct
Output Connector	XLR-3-12 equivalent
Cord Length	7.5 m (24.61 ft)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Finish	Body: Die-cast aluminum, black, mat finish, paint Punched net: Surface-treated steel plate, black, mat finish, paint
Dimensions	83 (W) × 23 (H) × 83 (D) mm (3.27" × 0.91" × 3.27") (cord excluded)
Weight	290 g (0.64 lb)

※ The EM-700 requires 9 – 52 V DC phantom power for operation.

■APPEARANCE

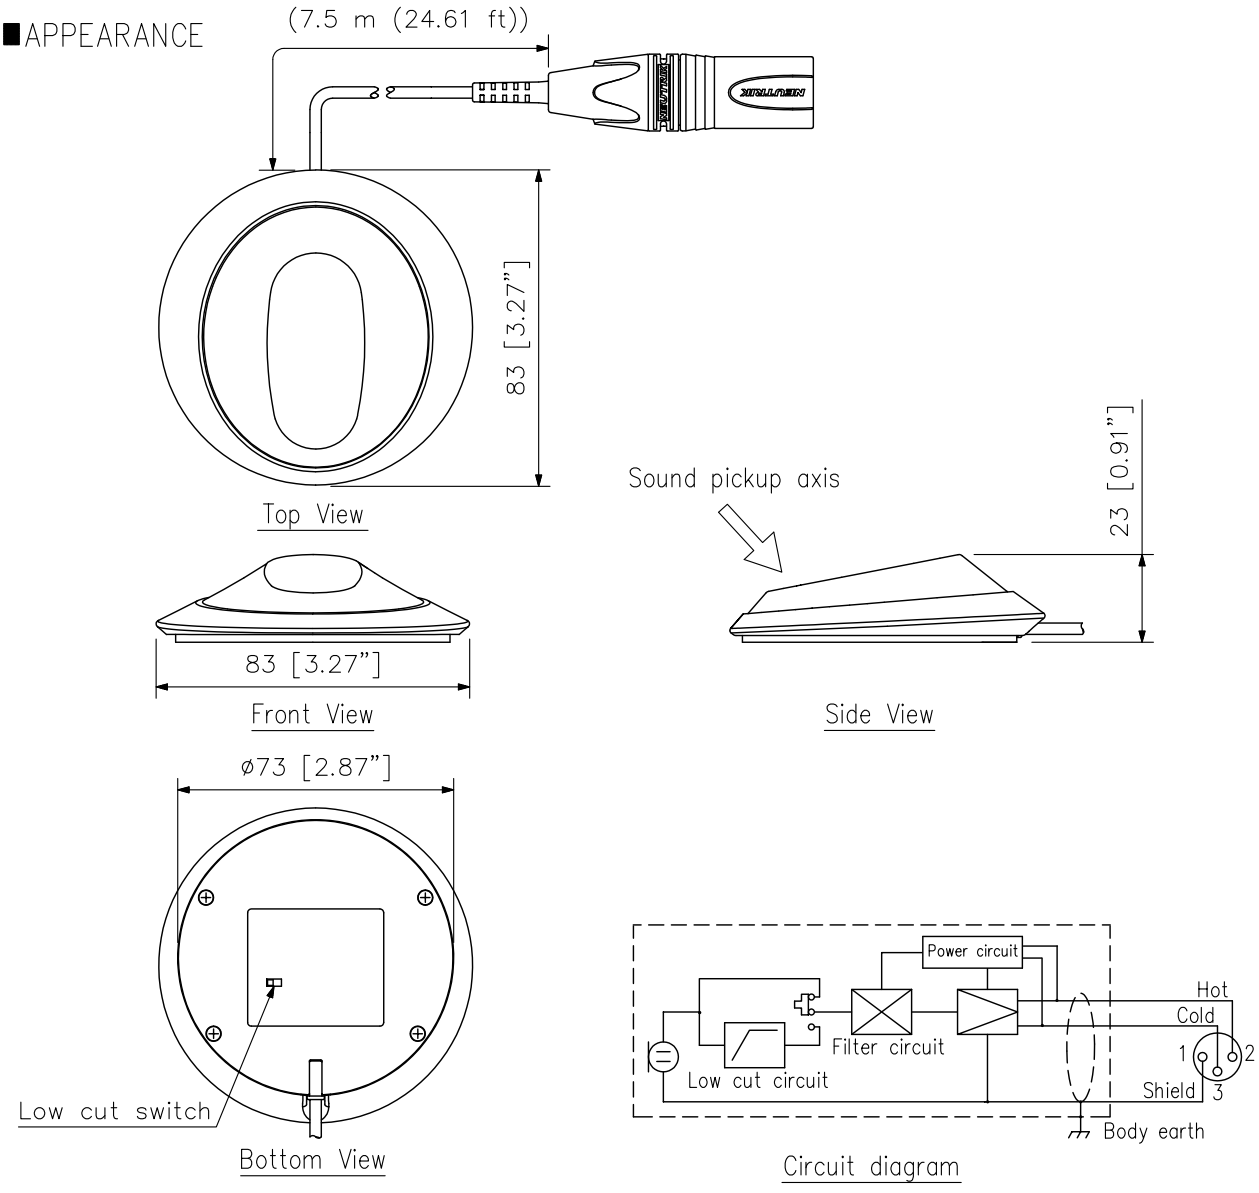

UNIT: mm SCALE: 1/2

Dovoz, distribuce a prodej v ČR:
AUDIO DIGITAL s.r.o.
www.audiodigital.cz