REMOTE CONTROL PANEL

ZM-9014

■DESCRIPTION

Designed for exclusive use with the 9000M2 Series amplifier or M-864D, the ZM-9014 is a wall mounted remote control panel having 4 buttons and 1 volume control knob. It is used in conjunction with the RC-001T Remote control module or M-864D.
It can be mounted in an American standard 2-gang electrical box in the wall.

■SPECIFICATIONS

Power Source	24 V DC (supplied from RC-001T or M-864D)
Current Consumption	50 mA or less
Terminal	Removable terminal block (10 pins)
Connection Cable	Shielded CPEV cable (paired data line and paired power line) or Category 5 twisted pair cable for LAN (CAT5-STP)
Operating Section	4 function buttons, 1 volume control
Indicator	4 function indicators (green LEDs), Level indicators (green LEDs)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	35 % to 80 %RH (no condensation)
Finish	Surface-treated steel plate, white, paint
Dimensions	120 (W) × 127 (H) × 58.5 (D) mm (4.72" × 5" × 2.3")
Weight	300 g (0.66 lb)
Accessory	Box mounting screw (No.6-32UNC × 30) ···4, Box mounting screw (M4 × 30) ···4, Panel mounting screw ···4, Removable terminal plug (10 pins) ···1

Note: Since no electrical box is supplied with the unit, prepare it separately.

■APPEARANCE

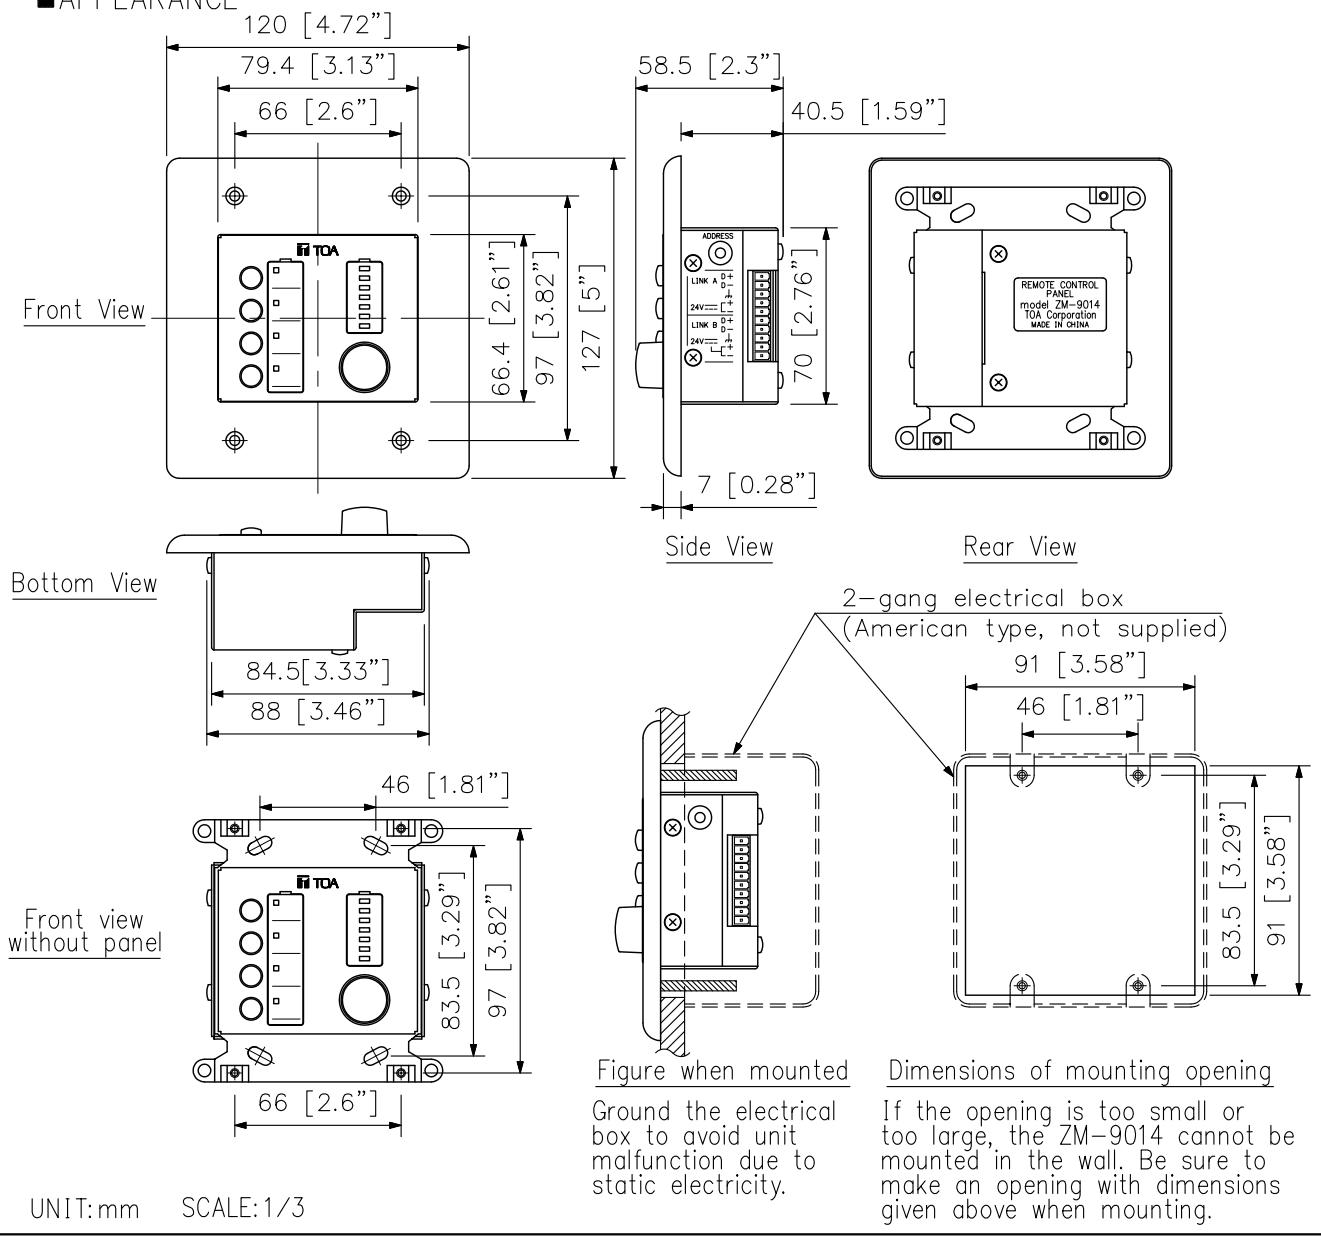

Ground the electrical box to avoid unit malfunction due to static electricity.

If the opening is too small or too large, the ZM-9014 cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.

UNIT: mm SCALE: 1/3

Dovoz, distribuce a prodej v ČR:
AUDIO DIGITAL s.r.o.
www.audiodigital.cz